

# SANDBLASTER

S70



### SAFETY

- ▶ EASY ACCESS TO THE HATCH
- ▶ REMOTE CONTROL SYSTEM
- ▶ AUTOMATIC CLOSING
- ▶ PROTECTION OF THE CLOSING CONE



### ECONOMY

- ▶ SANDBLASTING SETTING
- ▶ HIGH RESISTANCE INTEGRATED AIR PURIFIER
- ▶ TANK WITH OPTIMIZED CAPACITY OF 70L
- ▶ TANK OPERATING PRESSURE AT 10 bar



### COMFORT

- ▶ STRETCHER TYPE TRANSPORT SUPPORT
- ▶ ERGONOMIC DIMENSIONS
- ▶ SANDBLASTING HELMET KIT
  - ▶ ACTIVATED CARBON FILTER FOR HELMET SUPPLY
  - ▶ INTEGRATED AIR INTAKE FOR THE HELMET



## APPLICATIONS



▶ **MASONRY RENOVATION**




▶ **PAINT REMOVAL**



▶ **BUILDING FACADE RENOVATION**



▶ **RUST REMOVAL AND PREPARATION OF METAL SURFACES**

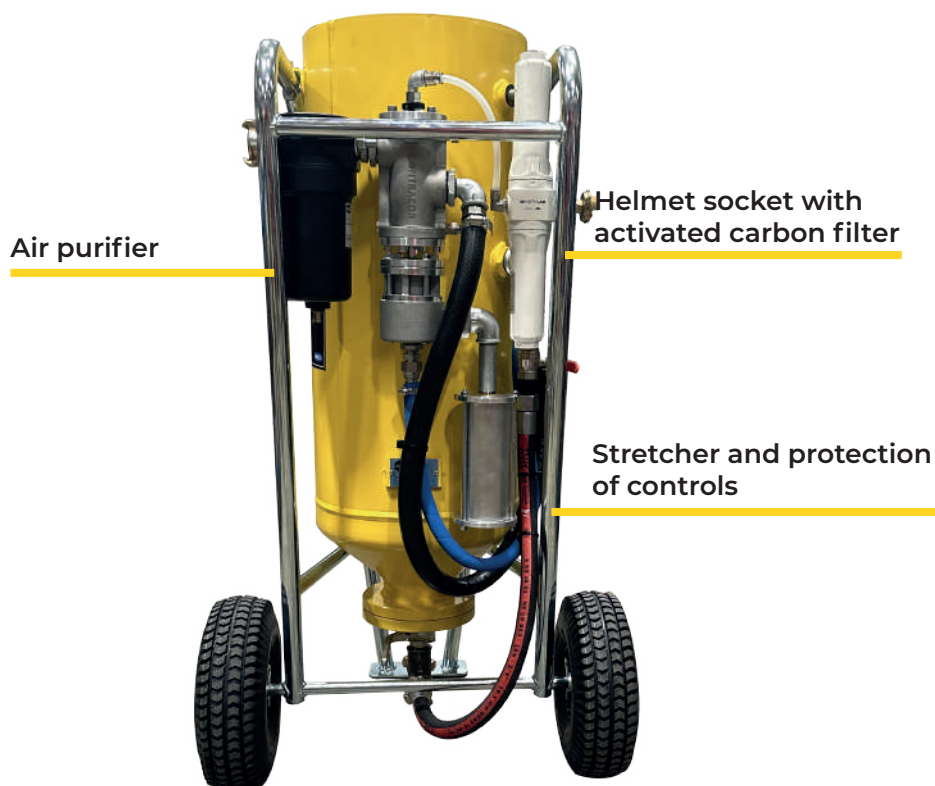

Abrasive flow control valve



Closure cone protection

# SPECIFICATIONS

## SANDBLASTER KIT

- ▶ S70 sandblaster with remote control
- ▶ Complete piping (length to choose)
- ▶ Carbide nozzle (size to choose)
- ▶ Air purifier for the sandblaster

## SANDBLASTING HELMET KIT

- ▶ ASTRO type sandblasting helmet and supply hose (length to choose)
- ▶ Activated carbon filters for the helmet


## USAGE TIPS

- ▶ Nozzle ø8 = compressor 5000 L/min
- ▶ Nozzle ø6,5 = compressor 3000 L/min
- ▶ Nozzle ø5 = compressor 2500 L/min



ASTRO type sandblasting helmet

| MODEL         | SABLEUSE   |            |             |            | WORKING PRESSURE | PIPEWORK  |
|---------------|------------|------------|-------------|------------|------------------|-----------|
|               | LENGTH     | WIDTH      | HEIGHT      | WEIGHT     |                  |           |
|               | mm - in.   | mm - in.   | mm - in.    | kg - lb    | bar - PSI        | m - in.   |
| <b>S70-10</b> | 600 - 23,6 | 680 - 26,8 | 1165 - 45,9 | 70 - 154,3 | 7 - 100          | 10 - 39,4 |
| <b>S70-20</b> | 600 - 23,6 | 680 - 26,8 | 1165 - 45,9 | 70 - 154,3 | 7 - 100          | 20 - 78,7 |



## OPTIONS

### OPTIONS

EXTERNAL AIR PURIFIER

Discover  
the whole  
catalogue on :



DISTRIBUTED BY :



**MAC3**



10 allée du canal  
ZC des Landes  
42160 Saint-Cyprien  
FRANCE



Tel : +33 (0)4 77 02 13 08  
Fax : +33 (0)4 77 02 20 28  
contact@mac3.fr



mac3.fr