


# MAC3



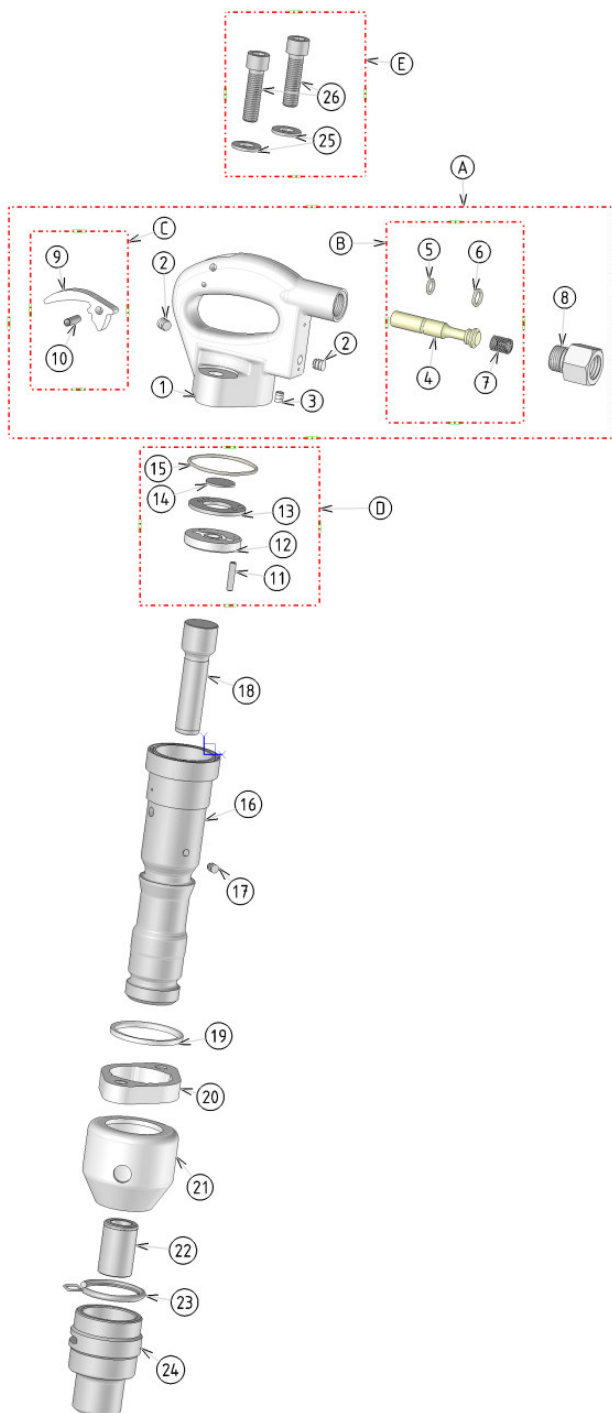

| Repère | Référence   | Qte | Désignation        | Designation          | Designación      |
|--------|-------------|-----|--------------------|----------------------|------------------|
| 1      | MAC3AP00837 | 1   | Poignée            | Handle               | Empuñadura       |
| 2      | MAC3AP00838 | 2   | Bouchon            | Plug                 | Tapa             |
| 3      | MAC3AP00852 | 1   | Bouchon            | Plug                 | Tapa             |
| 4      | MAC3AP00821 | 1   | Soupape            | Valve                | Válvula          |
| 5      | MAC3AS09868 | 1   | Joint              | O-ring               | Junta            |
| 6      | MAC3AS09869 | 1   | Joint              | O-ring               | Junta            |
| 7      | MAC3AP00841 | 1   | Ressort            | Spring               | Muelle           |
| 8      | MAC3AP04692 | 1   | Mamelon            | Nipple               | Racor            |
| 9      | MAC3AP04051 | 1   | Gâchette           | Trigger              | Gatillo          |
| 10     | MAC3AS00844 | 1   | Goupille           | Pin                  | Eje              |
| 11     | MAC3AS00832 | 1   | Goupille           | Pin                  | Eje              |
| 12     | MAC3AP00818 | 1   | Siège de frappe    | Seat                 | Silla de impacto |
| 13     | MAC3AP00834 | 1   | Plaque dépaissieur | Shimplate            | Placa            |
| 14     | MAC3AP00833 | 1   | Pastille           | Insert               | Pastilla         |
| 15     | MAC3AS00835 | 1   | Joint              | O-ring               | Junta            |
| 16     | MAC3AP03434 | 1   | Cylindre           | Cylinder             | Cilindro         |
| 17     | MAC3AP00852 | 1   | Bouchon            | Plug                 | Tapa             |
| 18     | MAC3AP00828 | 1   | Piston             | Piston               | Pistón           |
| 19     | MAC3AP00851 | 1   | Bague              | Ring                 | Anillo           |
| 20     | MAC3AP00850 | 1   | Bride              | Flange               | Brida            |
| 21     | MAC3AP00825 | 1   | Atténuateur        | Muffler              | Mufla            |
| 22     | MAC3AP03431 | 1   | Manchon C 17x60    | Sleeve R 0.680       | Mango R 0.680    |
|        | MAC3AP03428 |     | Manchon CH 17x60   | Sleeve RH 0.580      | Mango RH 0.580   |
| 23     | MAC3AP03447 | 1   | Ressort décaleur   | Spring retainer lock | Muelle Retenedor |
| 24     | MAC3AP03437 | 1   | Décaleur           | Retainer             | Retenedor        |
| 25     | MAC3AS00849 | 2   | Rondelle           | Washer               | Arandela         |
| 26     | MAC3AS00848 | 2   | Vis                | Screw                | Tornillo         |

| KIT |             | Kit Pour Réparation               | Repair Kit      | Kit de Reparación   |
|-----|-------------|-----------------------------------|-----------------|---------------------|
| A   | MAC3KS04999 | Poignée complète                  | Complete handle | Empuñadura completa |
|     |             | 1, 2(x2), 3, 4, 5, 6, 7, 8, 9, 10 |                 |                     |
| B   | MAC3KS09873 | Soupape                           | Valve           | Válvula             |
|     |             | 4, 5, 6, 7                        |                 |                     |
| C   | MAC3KS04108 | Gâchette                          | Trigger         | Gatillo             |
|     |             | 9, 10                             |                 |                     |
| D   | MAC3KS02138 | Distribution                      | Inlet valve     | Distribución        |
|     |             | 11, 12, 13, 14, 15                |                 |                     |
| E   | MAC3KS02142 | Vis poignée                       | Screw           | Tornillo            |
|     |             | 25(x2), 26(x2)                    |                 |                     |

| Emmanchement / Shank size /<br>Emmagadura (mm / In) | Poids / Weight / Peso<br>(Kg / Lb) | Longueur / Length / Longitud (mm<br>/ In) |
|-----------------------------------------------------|------------------------------------|-------------------------------------------|
| R 17x60 - 0.680 Round                               | 5 – 11                             | 354 – 14"                                 |
| RH 17x60 - 0.580 Hex                                | 5 – 11                             | 354 – 14"                                 |

| CARACTERISTIQUES                                                    |                |
|---------------------------------------------------------------------|----------------|
| Alésage / Bore / Escariado (mm / In)                                | Ø27.8 - 1 1/8" |
| Course piston / Piston stroke / Carrera del piston (mm / In)        | 46 - 2"        |
| Cadence de frappe / Impact rate / Golpes por minuto (cps/min / BPM) | 2800           |
| Pression / Pressure / Presion (Bar / psi)                           | 6 - 87         |
| Consommation / Air consumption / Consumo de aire (l/mm / cfm)       | 500 - 17.7     |
| Flexible / Hose / Manguera (mm / In)                                | Ø13 - Ø1/2"    |

